


UST510-52B-FL NEW

Fanless Embedded System with LGA1151 9th/8th Gen Intel® Core™ i7/i5/i3, Celeron®, Pentium® or Xeon® Processor for Vehicle PC

Features

- CE, FCC and E-Mark certified
- LGA1151 9th/8th Gen Intel® Core™ i7/i5/i3, Celeron®, Pentium® or Xeon® processor (up to 65W) with Intel® C246 (Coffee Lake)
- Fanless and wide operating temperatures from -40°C to +70°C
- Up to 8 GbE PoE port by RJ-45 connector type
- Supports M.2 Key B and M.2 Key E for wireless communication module
- Intelligent solution of Smart Ignition for power on/off schedule, vehicle battery protection and different power mode
- Convenient 2 hot-swappable HDD/SSD slots and flexible I/O windows

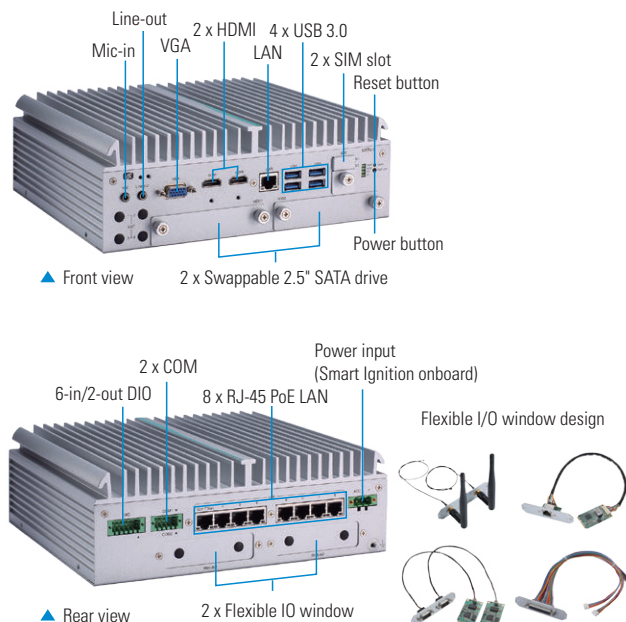

Specifications

Standard Color	Silver	
Construction	Aluminum extrusion and heavy-duty steel, supports up to IP40	
CPU	LGA1151 9th/8th gen Intel® Core™ i7/i5/i3, Celeron®, Pentium®, and Xeon® processor (CPU TDP max. up to 65W)	
Chipset	Intel® C246	
System Memory	2 x 260-pin DDR4-2666 ECC/non-ECC SO-DIMM, up to 64GB	
BIOS	AMI	
TPM	TPM 2.0	
System I/O Outlet	Serial	2 x terminal block RS-232/422/485 (4-wire)
	Display	1 x VGA (supports up to 1920 x 1200 @60Hz)
		2 x HDMI 1.4b (up to 3840 x 2160 @30 Hz)
	Audio	1 x Mic-in, 1 x Line-out
	Ethernet	Front side: • 1 x RJ-45 GbE LAN (Intel® i211-AT) Rear side (flexible LAN selection) : • 8 x RJ-45 GbE LAN (Intel® i211-AT)
	USB	4 x USB 3.0
	DIO	1 x Terminal block isolated 6-in/2-out DIO (isolation voltage: 2 kV)
	Others	1 x Reset button 4 x Antenna opening 2 x External accessible SIM card socket 2 x Flexible I/O window
Expansion Interface	1 x Full-size Rev.1.2 PCI Express Mini Card slot (1 x mSATA/USB/PCIe)	
	1 x Half-size Rev.1.2 PCI Express Mini Card slot (1 x mSATA/USB)	
	1 x M.2 3050/3042 Key B	
	1 x M.2 2230 Key A & E	
Storage	SATA Drive	2 x 2.5" 9.5 mm swappable SATA drive with 2 SATA, Intel® RAID 0/1 supported
	mSATA	2 x mSATA (occupied 2 x PCI Express Mini Card slot)
Watchdog Timer	255 levels, 1 to 255 sec.	

Power in	Power Supply	General use: 1 x Terminal block, 9 to 36 VDC Vehicle: 1 x Terminal block, 12/24 VDC with smart ignition
	Power Consumption	DC 24V@6.91A
PoE (PSE, Power Sourcing Equipment)	PoE Performance	Up to 8 x RJ-45 output max. 90W supports PoE & PoE+ • PoE (802.3af 15.4W/port) • PoE+ (802.3at 30W/port)
System Indicator	1 x LED indicator for SATA drive activity 1 x LED indicator for power 2 x Programmable	
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with W.T. peripheral*	
Humidity	0% to 95%, non-condensing	
Dimensions	240 mm (9.45") (W) x 210.5 mm (8.28") (D) x 82.2 mm (3.23") (H) *Without wall mount	
Mounting	Wall mount	
Weight (net/gross)	4.16 kg (9.17 lb)/4.82 kg (10.62 lb)	
Certifications	CE (Class A), FCC (Class A), E-Mark (E13) certified	
EMC	CE/FCC	EN 55032 (Class A), EN 55035, FCC part 15 B (Class A)
	E-Mark	ECE-R10
Vibration Endurance	3 Grms w/ SSD (5 to 500Hz, X/Y/Z direction; random, operating) 1 Grms w/ HDD (5 to 500Hz, X/Y/Z direction; random, operating) 2.5 Grms w/ HDD & Anti-Vibration Kit (5 to 500Hz, X/Y/Z direction; random, operating) MIL-STD-810G, Method 514.6C-VI Category 4 compliant	
EOS Support	Windows® 10 64-bit, Linux	
Software Support	AMS.AXView	

*Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

Standard

UST510-52B-FL-A (P/N: E274510100)	Fanless embedded system with 9th/8th gen Intel® desktop processor (LGA1151), C246, VGA, 2 HDMI, 6-in/2-out DIO, 2 COM, 4 USB 3.0, 8 RJ-45 PoE GbE LAN, 2 SATA drives and ACC ignition, and TDC*
--------------------------------------	---

*TDC: terminal block DC-in connector, DC voltage input

Optional

Anti-Vibration Kit (P/N: 8816N5008A0E)	For in-vehicle/rolling stock which improves HDD stability in NVR applications
Communication Modules	8816N5003A0E AP12356 w/WT Wi-Fi kit for tBOX/UST SFP (E) 8816N810DA0E GPS kit M8U w/UDR for tBOX SFP(E) 88160620BA0E LTE SIMCOM SIM7100 (EU) for tBOX/UST SFP(E) 8816N5000A0E LTE SIM7100JC kit for tBOX500, JPN SFP (E) E9C6300014 Wi-Fi M.2 2230 QCNFA364A 802.11AC+BT5/WT

*Specifications and certifications may vary based on different requirements.

Power Protection

OCP (over current protection)

OVP (over voltage protection)

UVP (under voltage protection)

RPP (reverse polarity protection)

ISO 7637-2 pulse 1, 2a, 2b, 3a, 3b, 4 (vehicle version)

Setting for in-vehicle battery protection: system will be automatically turned down at low voltage level

Setting for ignition control: system will activate a counter while in-vehicle battery at low voltage, ACC-ON delay and shut down delay

Dimensions

